



# Product Range & Pack Sizes

Successfully supplying the Mining Industry with lubricants in  
Australia and overseas for 18 years

## PREMIUM LUBE PL-9501

### Heavy duty high performance grease. NLGI 2

A No.2 consistency grease, which is formulated to resist high temperature, water wash, fling off and wear.

It contains a tackiness additive and has lubricating solids within its formulation.

### *Application*

General heavy loaded components, subject to arduous condition, hot, dusty or wet environment.

A wide variety of applications such as, thread lubricant, general earth moving, heavy plant lubrication and sliding surfaces and in particular drill rod threads.



**20Kg, 10Kg,  
2.5Kg, 450Gm**

## DRTG ZN50 ZN50-9502

### Heavy duty high performance grease. NLGI 2

A No.2 consistence grease, which is formulated to prevent galling, water washout, friction, fling off and wear.

It contains a tackiness additive and is made up of 50% metallic zinc within its formulation.

### *Application*

General heavy loaded components, subject to arduous condition, hot, dusty or wet environment. A wide variety of applications such as, thread lubricant and sliding surfaces and in particular drill rod threads.

Particularly suited to exploration drilling.



**20Kg, 2.5Kg**

## PREMIUM TENACITY LUBE PTL-9503

### Heavy duty high performance grease. NLGI 2

No.2 consistence grease, which is formulated to resist high temperature, water wash, fling off and wear.

It contains a tackiness additive and has lubricating solids within its formulation.

### *Application*

General heavy loaded components, subject to arduous condition, hot, dusty or wet environment.

A wide variety of applications such as, thread lubricant, general earth moving, heavy plant lubrication and sliding surfaces and in particular drill rod threads



**20Kg**

## EXTRA HEAVY DUTY PLANT GREASE PG-9509

### Extra heavy duty high performance grease. NLGI 2

A No.2 consistency grease, which is formulated to resist extreme temperatures, water wash, fling off and wear.

It contains a tackiness additive and has lubricating solids within its formulation.

### *Application*

General heavy loaded components, subject to arduous condition, hot, dusty or wet environment.

A wide variety of applications such as, general earth moving, heavy plant lubrication and sliding surfaces.



**180Kg, 20Kg, 450Gm**

## METAL FREE THREAD LUBE MFTL-9505

### Heavy duty high performance metal free grease. NLGI 2

A metal free No.2 consistence grease, which is formulated to resist high temperature, water wash, fling off and wear.

It contains a tackiness additive within its formulation.

### *Application*

Specifically designed as a drill rod thread lubricant where high anti-seize performance is required.



**20Kg, 2.5Kg**

## DRG 3 PL-9511

### Heavy duty high performance extreme pressure grease. NLGI 3

Hardrock DRG 3: is an NLGI .3 consistency grease. It is a premium lithium soap thickened grease formulated with an advanced extreme pressure (EP) and anti-wear (AW) additive technology.

It contains polymer to provide extra adhesive strength and water resistance.

Hardrock DRG3 is a special grease developed for rock drill and other similar mining and industrial applications. In addition to its EP and anti-wear characteristics it also provides a high level of oxidation, rust and water washout protection. Vel-lith DRG3 has demonstrated outstanding performance with regard corrosion protection, low temperature pumpability and high temperature service. Most importantly, Vel-lith DRG3 possesses special adhesive components to resist throw-off and provide excellent sealing between metal surfaces.

### *Application*

General heavy loaded components, subject to arduous condition, hot, dusty or wet environment.

A wide variety of applications such as, thread lubricant, general earth moving, heavy plant lubrication.



## ROD GREASE RG-9506


### Heavy duty high performance grease.

A metal free lithium complex No.2 consistence grease, which is formulated to resist heat, fling off.

It contains a tackiness additive .

### *Application*

For use on the external surfaces of drill rods.

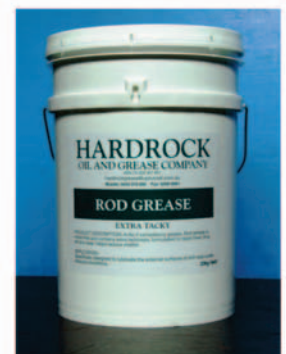

**20Kg**

## MOLY GREASE MG-9508

### **Heavy duty high performance grease.**


A No.2 consistency grease, which is formulated to resist high temperature, water wash, fling off and wear.

It contains a tackiness additive and has 3% Molybdenum Disulphide within its formulation.

### ***Application***

General heavy loaded components, subject to arduous condition, hot, dusty or wet environment.

It has a wide variety of applications such as, general earth moving, heavy plant lubrication.

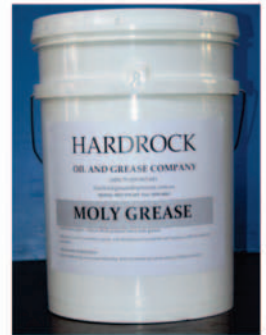

**20Kg**

**Pack sizes are flexible and all products are available in any configuration upon request**



**Stock readily available**



**Mining . Earthmoving . Heavy Plant**